



DESCRIPTION

- ✓ Adjustable throttles for modular mounting-DR6M/32...
- ✓ The valve throttles , or completely stops the flow in any direction , so creating resistance to flow regulation and support in the hydraulic system.
- ✓ Mounting surface CETOP3 (NG6)


DIMENSIONS

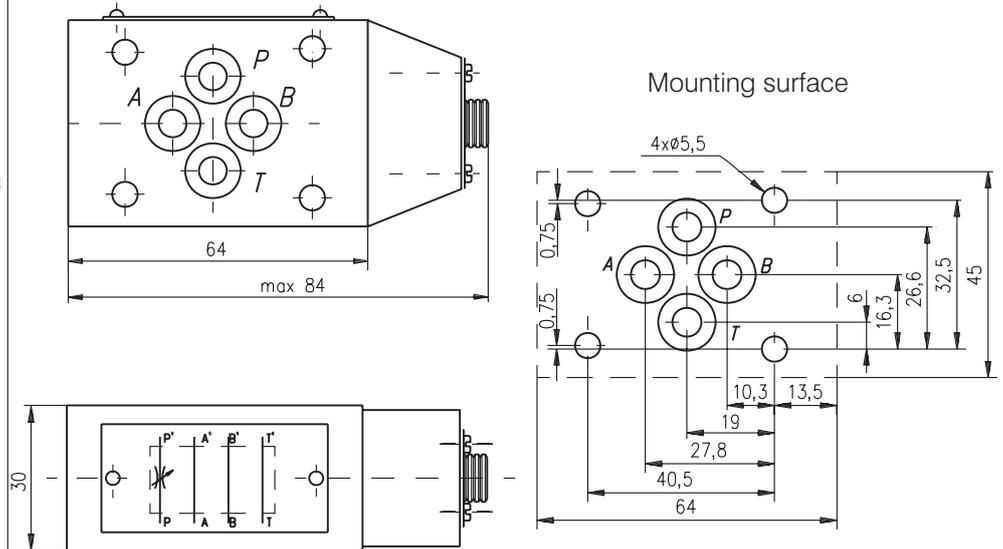

SYMBOL



DR6M/32T



DR6M/32P

ORDERING CODE

DR 6 M / 32 ***

Adjustable throttle

Nominal bore 6mm.

Modular mounting

Rated pressure: up to 320 bar.-32

Valve location: at line T - T
at line P - P

TECHNICAL DATA

Weight	DR6M/32T	0,710 kg
	DR6M/32P	0,710 kg
Max. Pressure		320 bar
Rated flow ($\Delta p=2,5$ bar.)		20 l/min
Working liquid-hydraulic oils with characteristics:		
-viscosity		10...400 cSt
-degree of filtration		0,025 mm
-temperature		-20...+80°C