



DESCRIPTION

- ✓ Adjustable throttles with for modular mounting-DR10M/32...
- ✓ The valve throttles , or completely stops the flow in any direction , so creating resistance to flow regulation and support in the hydraulic system.
- ✓ Mounting surface CETOP5 (NG10)


DIMENSIONS

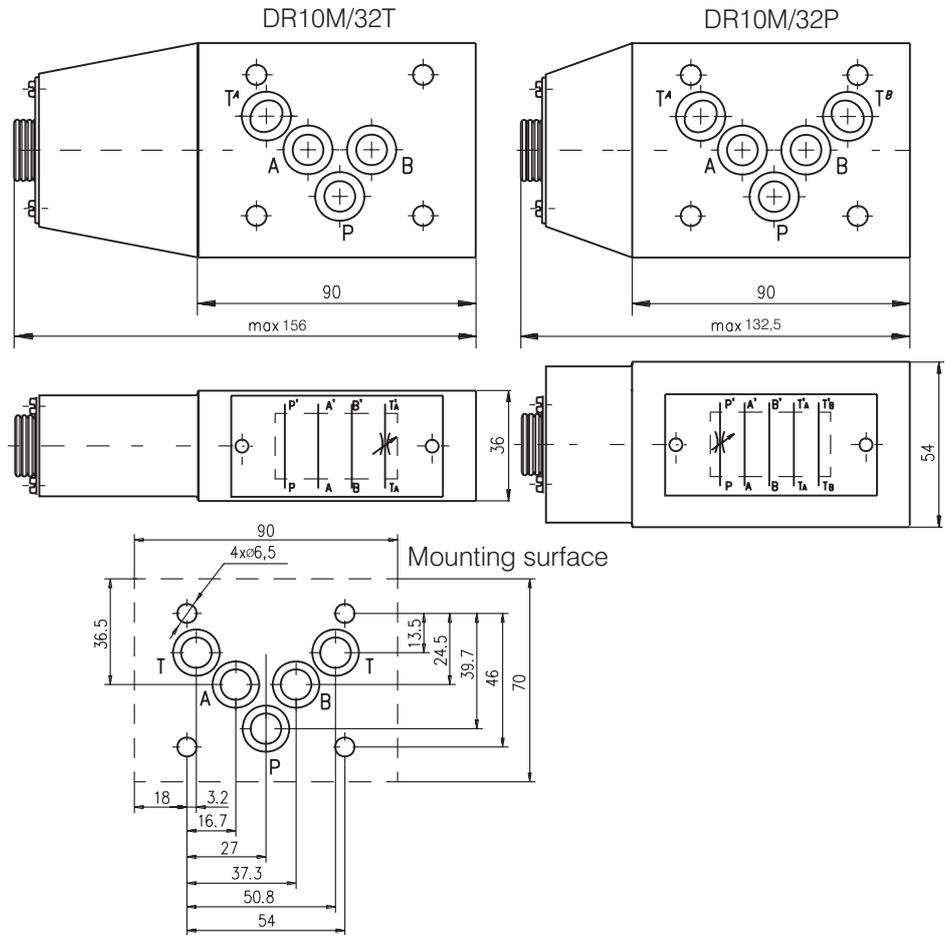

SYMBOL



DR10M/32T



DR10M/32P

ORDERING CODE

DR 10 M / 32 ***

Adjustable throttle

Nominal bore 10mm.

Modular mounting

Rated pressure: up to 320 bar.-32

Valve location: at line T - T
at line P - P

TECHNICAL DATA

Weight	DR10M/32T	2,200 kg
	DR10M/32P	2,850 kg
Max. Pressure		320 bar
Rated flow ($\Delta p=2,5$ bar.)		40 l/min
Working liquid-hydraulic oils with characteristics:		
-viscosity		10...400 cSt
-degree of filtration		0,025 mm
-temperature		-20...+80°C