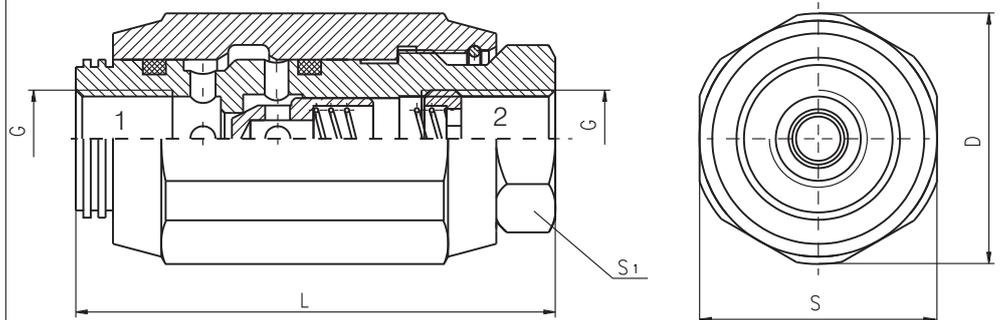



DESCRIPTION

- ✓ Adjustable throttles with check valves for pipe mounting-DROK-...
- ✓ The throttle check valves limit flow by adjustable throttling spool at one direction , and allow free return passing on the other.

DIMENSIONS


| TYPE | L | S | S1 | D | G |
|-----------|-----|----|----|----|------|
| | mm. | | | | |
| DROK-1/4" | 65 | 32 | 22 | 34 | 1/4" |
| DROK-3/8" | 65 | 36 | 24 | 38 | 3/8" |
| DROK-1/2" | 82 | 42 | 29 | 44 | 1/2" |
| DROK-3/4" | 100 | 52 | 36 | 55 | 3/4" |
| DROK-1" | 126 | 65 | 45 | 70 | 1" |

SYMBOL

ORDERING CODE

| | | |
|------|---|-----|
| DROK | - | *** |
|------|---|-----|

 Adjustable throttle with
check valve

Mounting threads:

| |
|-----------|
| G1/4-1/4" |
| G3/8-3/8" |
| G1/2-1/2" |
| G3/4-3/4" |
| G1-1" |

TECHNICAL DATA

| | | |
|---|------|--------------|
| Max. Pressure | | 320 bar |
| Rated flow ($\Delta p=2,5$ bar.) | -1/4 | 12 l/min |
| | -3/8 | 20 l/min |
| | -1/2 | 45 l/min |
| | -3/4 | 80 l/min |
| | -1 | 160 l/min |
| Working liquid-hydraulic oils with characteristics: | | |
| -viscosity | | 10...400 cSt |
| -degree of filtration | | 0,025 mm |
| -temperature | | -20... +80°C |