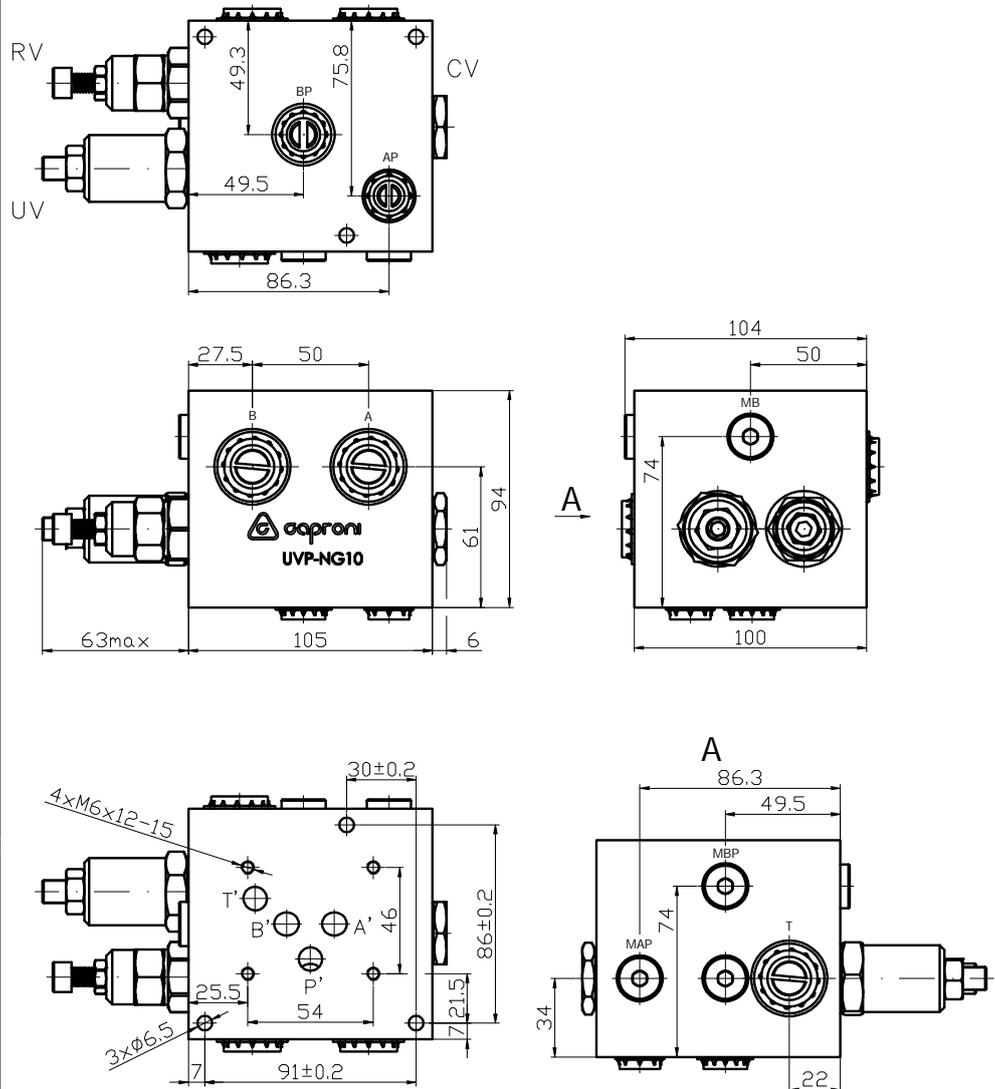
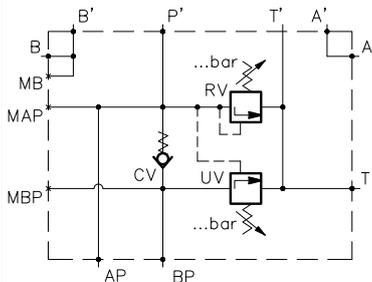
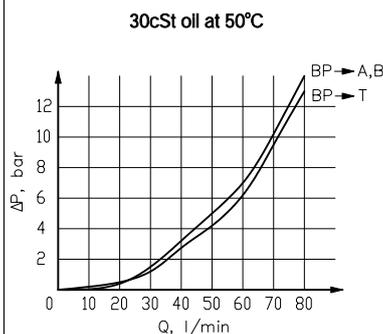


DESCRIPTION

The valve is used in hydraulic systems with 2 parallel working pumps in order to unload the higher flow pump (BP) to the tank when the adjusted pressure of unloading valve is reached. Then the actuator works with the lower flow pump (AP) at higher pressure. The valve is designed for direct flange mounting of solenoid valve CETOP5 (NG10).

DIMENSIONS

SYMBOL

PERFORMANCE

TECHNICAL DATA

Pressure range:	BP	30...70 bar
	AP	30...300 bar
Max. flow:	AP	20 l/min
	BP	55 l/min
	T	70 l/min
Port threads:	AP	G3/8"
	BP	G1/2"
	T, A, B	G3/4"
	M...	G1/4"
Weight		7,4kg